


# ROLINE DisplayPort Cable, v2.1, 10K@60Hz, 54Gbit/s, UHBR13.5, DP-DP, M/M, black, 2 m

|                           |               |
|---------------------------|---------------|
| <b>Product No.</b>        | 11.04.6022    |
| <b>Manufacturer</b>       | ROLINE        |
| <b>Manufacturer No.</b>   | 11.04.6022    |
| <b>EAN (single piece)</b> | 7630049628793 |

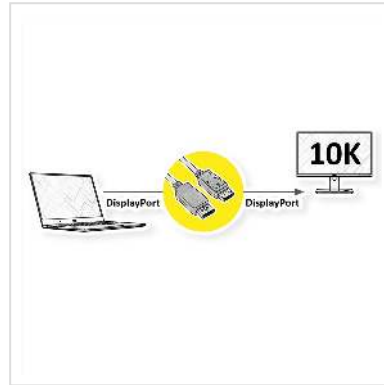

**10K**

**HDR**

**ROLINE DisplayPort Cable with DP connection on both sides for connecting an Ultrabook, Notebook/Laptop or PC to a monitor, TV or projector - for screen transmissions in excellent quality with resolutions of up to 10240x4320 @60Hz!**

- DisplayPort is a universal connection standard for the transmission of picture and sound signals, widely known and appreciated in computer, industry and modern house wiring. Applications include mainly the connection of monitors or projectors to computers, notebooks/laptops, ultrabooks, NUCs and similar devices.
- The connector requires less space than VGA or DVI and is therefore more suitable for portable devices for two connectors on a graphics card (on one slot plate).
- DisplayPort v2.1 supports Display Stream Compression 1.2a (DSC), Forward Error Correction and the HDR10 standard.
- DP v2.1 can reach a maximum resolution of 10K (10240x4320) @60Hz or 4K (3840x2160) @120Hz
- The practical plug design prevents the cable from slipping out of the DisplayPort socket and guarantees a stable audio and video transmission.
- Compliant DP v2.1 (max. 10240 x 4320 @60Hz)

## Technical specifications

|                                    |                          |
|------------------------------------|--------------------------|
| Manufacturer                       | ROLINE                   |
| Product group                      | Cable                    |
| Product type                       | DisplayPort Cables       |
| Colour                             | black                    |
| Length                             | 2 m                      |
| Transfer quality                   | DisplayPort v2.1         |
| Max. resolution                    | 10240 x 4320 @60Hz (10K) |
| side 1 connector                   | DisplayPort M            |
| side 2 connector                   | DisplayPort M            |
| Side 1 Connector Type              | DisplayPort              |
| Side 1 Connector Gender            | Male                     |
| Side 2 Connector Type              | DisplayPort              |
| Side 2 Connector Gender            | Male                     |
| Area of application                | External                 |
| Cable shielding                    | Screened                 |
| Material (external cable mantle)   | PVC                      |
| Operating temperature min.         | -10 °C                   |
| Operating temperature max.         | 60 °C                    |
| Weight                             | 106 g                    |
| Height of packaging (single piece) | 20 mm                    |
| Width of packaging (single piece)  | 150 mm                   |
| Depth of packaging (single piece)  | 150 mm                   |
| Package weight (single piece)      | 0.1 kg                   |