

Fig. Safe EWS1000, hinge right
2 x K-Lock S+G adjustable each 1 key guide tube 2 bits, 2 shelves

DESIGNED IN AUSTRIA
MADE IN EUROPE

EN1143-1
Burglary protection

EN15659
Fire protection (option)

Grade V

Grade V
+ LFS60 (option)

Class EN 5

4102 (light fire protection)

Domestic insurable by arrangement

Commercial insurable up to EUR 250.000

Model	Outside dimensions h x w x d (mm)	Inside dimensions h x w x d (mm)	SH	Volume (l)	Weight (appr. kg)
EWS0849R	848 x 645 x 565	695 x 495 x 320	1	110	665
EWS0850R	848 x 810 x 725	695 x 660 x 480	1	220	935
EWS1000R	1003 x 810 x 725	850 x 660 x 480	2	269	1060
EWS1200R	1193 x 810 x 725	1040 x 660 x 480	2	329	1220
EWS1600R	1538 x 810 x 725	1385 x 660 x 480	3	439	1505
EWS1901R	1883 x 810 x 725	1730 x 660 x 480	4	548	1790
EWS1903R	1883 x 1110 x 725	1730 x 960 x 480	4	797	2230
EWS1902	1883 x 1110 x 725	1730 x 960 x 480	4	797	2270
EWS1904	1883 x 1415 x 725	1730 x 1265 x 480	4	1050	2720

SH = Shelf

Please add 60 mm to the listed outside depth for mountings.


[Safes] [Type EWS]

EWS series safes are designed for total protection and offer Wertheim's usual level of high security. They are available with optional fire protection – tested and certified according to LFS60.
Safes weighing less than 1.000 kg must be anchored.

[Product information]

Hinge	DIN right – model designation R (EWS1902, EWS1904 double-doored) option: DIN left
Door opening angle	180°
Body	double-walled, reinforced, filled with armoured, high resistant barrier material
Door structure	triple-walled, reinforced, filled with armoured, high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
Locking mechanism	three-way moving boltwork with large steel bolts, protected by glass plate with additional emergency re-lockers, fix engaging steel bolts on the hinge side
Anchoring	fitted for floor anchoring anchoring bolts and shields are supplied for EWS0849, EWS0850 option: additional anchoring holes (customer specifies position)
Alarm connection	VdS-certified cable channels to allow connection to a burglar alarm system
Colour	inside and outside RAL 7037 dusty grey option: special colour according to RAL
Lock	safes in grades IV and higher have to be equipped with at least 2 certified locks any set of locks (from VdS class 2 up) is possible
Equipment	shelf adjustable (height setting 69 mm, EWS0849 60 mm) option: additional shelf, inside locker option (from EWS0850 up): drawer, pull-out shelf
Accessories	option: fire protection door rebate seals, alarm switch set, interior lighting
Option	additional certified fire protection LFS60P – except models: EWS0849, EWS1902, EWS1904 bolted version from Model EWS1000 up up – assembly on site

[Equipment options]

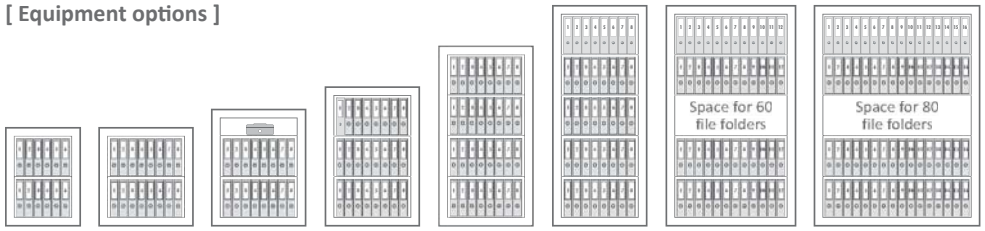

EWS0849 EWS0850 EWS1000 EWS1200 EWS1600 EWS1901 EWS1903/1902 EWS1904