Fire Resistant Safes

series: **FRS**
grade: **LFS 60P**

VALBERG

YOU GOT MORE


BEST SELLER

Laser cut effect

MULTI LAYER SYSTEM

LFS 60 P ECB·S certified





FRS 30




FRS 133


Optional wheels available




Model									KG	Vol
FRS 30	296	430	365	188	326	236	-	tray	31	15
FRS 32	315	445	425	207	341	296	-	tray	38	21
FRS 49	490	361	425	382	257	296	-	1+tray	46	29
FRS 51	510	445	425	402	341	296	-	1+tray	54	41
FRS 66	653	485	450	467	346	301	85x343	1	75	49
FRS 67	713	485	450	527	346	301	85x343	1	86	49
FRS 75	792	485	450	607	346	301	85x343	1	103	64/8
FRS 93	972	565	450	786	426	301	85x423	2	138	98/10
FRS 120	1249	711	580	1034	546	418	135x515	2	290	236/26
FRS 133	1363	711	580	1170	546	418	135x515	2	332	267/26
FRS 165	1700	711	580	1487	546	418	135x515	3	390	340/26




Digital lock + Key lock



Digital lock + Thumbturn




Digital lock + Key lock



Digital lock + Handle

The outer depth is given without the handle and the lock.

The outer height is given without wheels. The height with wheels is +20 mm

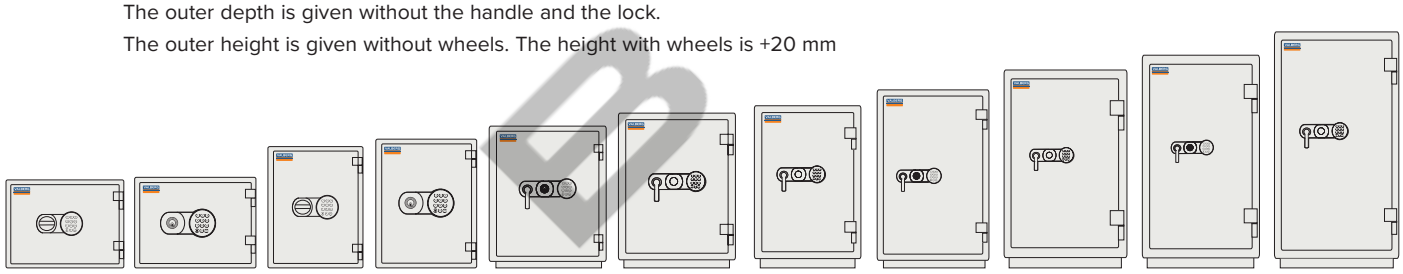

FRS 30 FRS 32 FRS 49 FRS 51 FRS 66 FRS 67 FRS 75 FRS 93 FRS 120 FRS 133 FRS 165

- Fire resistance – LFS 60P according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Dead bolts on hinge side
- The thickness of wall 50 mm.
- The thickness of door 95 mm.
- Pull out tray or drawer included.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

PROOF

Innovative solutions for series FRS

VALBERG


series: **FRS**



Dead bolts on hinge side



Pull out tray

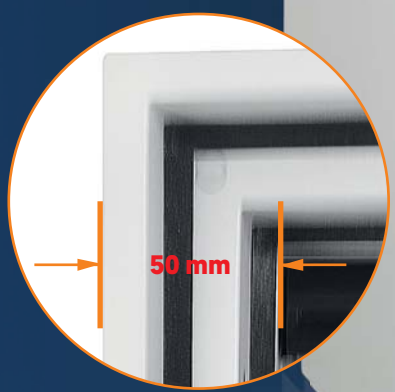

Multilayered wall structure, thickness of 50 mm



Pull out drawer





Multilayered door structure, thickness of 95 mm

BEST SELLER

Laser Cut Effect

MULTI LAYER SYSTEM