Commercial Safes

series: **Garant**
grade: **I, LFS 60P**

VALBERG

BEST SELLER

Laser cut effect

MULTI LAYER SYSTEM

GRADE I ECB·S certified

LFS 60 P ECB·S certified

YOU GOT MORE



GARANT 67



GARANT 46

Model									KG	Vol
Garant 46	490	480	455	330	332	295	1	8	106	33
Garant 67	670	480	455	510	332	295	1	8	136	49
Garant 75	750	555	547	590	407	388	1	9	193	93
Garant 95	980	545	455	820	400	295	1	9	205	94
Garant 110	1100	555	547	940	407	388	2	10	287	148
Garant 133	1336	701	580	1142	527	388	2	10	413	233
Garant 165	1652	701	580	1459	527	382	3	11	501	298




Key lock
Kaba 71111



Digital lock
Grade B (PS-600)

The outer depth is given without the handle and the lock.

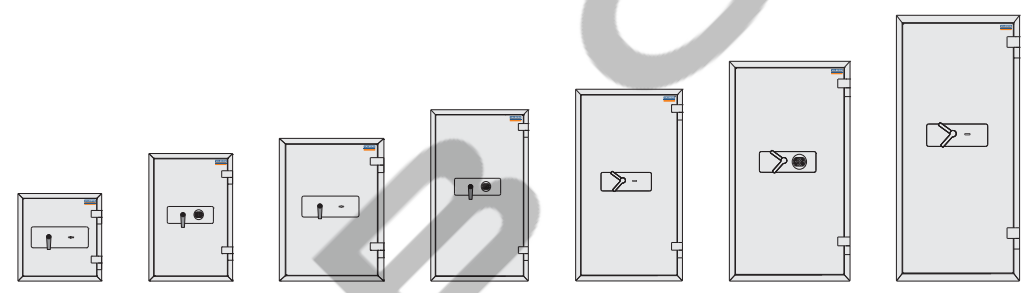

GARANT 46 GARANT 67 GARANT 75 GARANT 95 GARANT 110 GARANT 133 GARANT 165

- Burglary resistance – EN 1143-1, Grade I.
- Fire resistance – LFS 60P according to EN 15659.
- The safe body and door are manufactured with two inter-welded walls that are filled with fire resistant concrete.
- Thickness of door – 110 mm
- Thickness of walls – 80 mm
- Three way locking bolts. Double vertical bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Anchoring to the floor.
- Color: RAL 7035 (light grey), also available in RAL 7024 (grey graphite).

BOSS

Innovative solutions for series Garant

series: Garant



Dead bolts on hinge side



Double vertical bolts



Reinforced frame.



Multilayered wall structure, thickness of 80 mm



Multilayered door structure, thickness of 110 mm

MOCK UP

Laser Cut Effect

MULTI LAYER SYSTEM

YOU GOT MORE